

# NOVACORD

MULTICORE 8P 26/7 DMX FRNC/LSZH-C



Tinned Copper



Analog and digital signals



One inner and two overall screens




Pure signal transmission of 8x2 cores



Audio cables are used in professional broadcast systems to transmit analog and digital AES/EBU audio signals. The cable contains 8 pairs of twisted two copper cores. Each pair is protected by its own aluminum foil screen, as well as the cable has two overall screens - aluminum foil and braid tinned copper screens. Cable designed to avoid the release of toxic matter in case of fire because they do not contain any halogens.

**МУЗЦЕНТР**  
МУЗЫКАЛЬНОЕ ОБОРУДОВАНИЕ  
<https://muzcentre.ru>


Pictures:



**HIGHEST QUALITY - RELIABILITY - INNOVATION**

Novacord

# Multicore audio cable 8P 26/7 DMX, AWG 26, FRNC/LSZH-C, IEC 60332-3-24

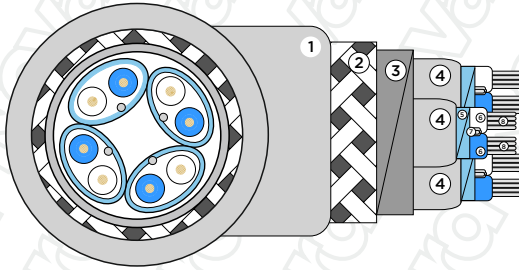

- 1 - Jacket
- 2 - Overall screen #1
- 3 - Overall screen #2
- 4 - Pair jacket
- 5 - Pair screen
- 6 - Insulation
- 7 - Drain wire
- 8 - Conductor

## Structure

<b>Conductor</b>	<b>Cross Sec. Area</b>	0.14 mm <sup>2</sup> , Ø 0.48 mm
	<b>No. of Cores</b>	16 cores
	<b>Material</b>	Tinned copper
	<b>Type of conductor</b>	Stranded
	<b>Strands</b>	7/0.16 mm
<b>Insulation</b>	<b>Material</b>	FPE
	<b>Diameter</b>	1.4 ±0.1 mm
	<b>Color</b>	Blue, White
<b>Pair stranding</b>		Two cores twisted to the pair
<b>Pair screen #1</b>	<b>Material</b>	Aluminum Foil
	<b>Diameter</b>	Ø 2.5 mm
<b>Pair screen #2</b>	<b>Type</b>	Drain wire
	<b>Material</b>	Tinned OFC
	<b>Composition</b>	7/0.16±0.008 mm
<b>Pair jacket</b>	<b>Material</b>	LSZH-FR
	<b>Diameter</b>	Ø 3.3 mm
<b>Overall Screen #2</b>	<b>Material</b>	Aluminum Foil
<b>Overall Screen #1</b>	<b>Material</b>	Tinned copper
	<b>Type</b>	Braid
	<b>Covering</b>	80%
<b>Jacket</b>	<b>Material</b>	FRNC/LSZH-C
	<b>Diameter</b>	11.9±0.2 mm
	<b>Color</b>	Grey, RAL7001

# Multicore audio cable 8P 26/7 DMX, AWG 26, FRNC/LSZH-C, IEC 60332-3-24

## Mechanical properties

Bending radius	without load	10xD (outer diameter)
	with load	15xD (outer diameter)
Temperature range	-30°C to +70°C	

## Electrical properties

DC loop Resistance	≤ 288 Ω/km
Insulation resistance	≥ 2000 MΩ/km
Mutual capacitance at 800 Hz	nom. 45 nF/km
Test voltage	700 V
Capacitance unbalance (pair to ground)	≤ 1200 pF/km
Velocity ratio	approx. 78%
Characteristic impedance	110 Ω ± 10%

## Standarts

Flame resistance	IEC 60332-3-24
Amt of Halogen	zero

## Technical data

Article	Delivery length	Drum size	Weight
500DW	500 m	400/160/200	85 kg

© NOVACORD Inc. 2022 All Rights Reserved

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Novacord Inc. Although Novacord makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described here in are subject to error or omission

Novacord Inc. provides the information and specifications herein on an "ASIS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Novacord be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Novacord has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Novacord Inc. The information is believed to be correct at the time of issue. Novacord Inc. reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Novacord Inc.

**HIGHEST QUALITY - RELIABILITY - INNOVATION**

novacord.de